


# 钢制曲轮平顶链

## Steel Sideflex Flat-Top Chains

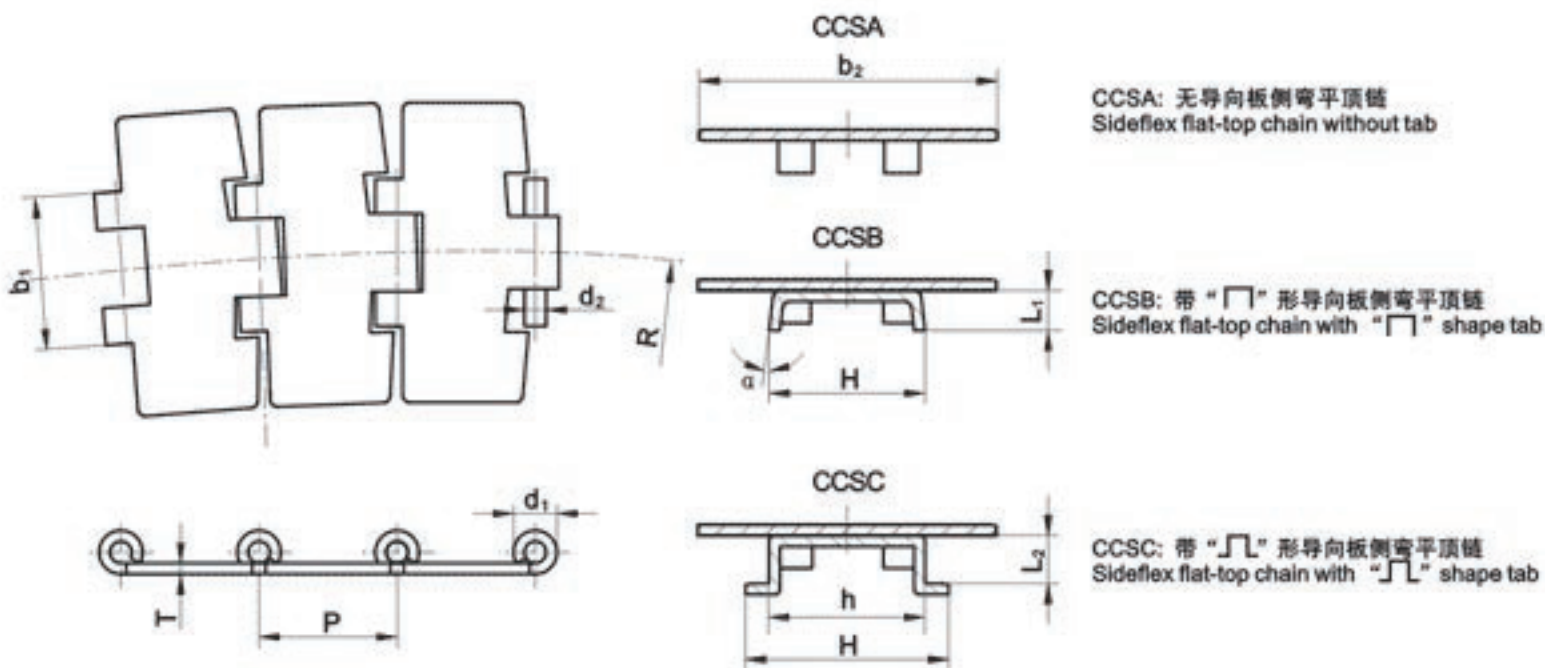

链号 Chain No.	节距 Pitch P	链板宽度 Slat width b <sub>2</sub>	固定铰卷外跨宽 Width over fixed curl b <sub>1</sub> mm	销轴直径 Pin diameter d <sub>2</sub>	链板厚度 Slat thickness T	活动铰卷直径 Gearing curl diameter d <sub>1</sub> (max)	侧弯半径 Sideflex radius R(min)	导向板参数 Float-prevention tab details					最小抗拉强度 Ultimate tensile strength		每米净重 Weight per meter q			
								H	h	L <sub>1</sub>	L <sub>2</sub>	α°	300系列 300 series Q(min) kN	400系列 400 series Q(min) kN				
CC13SA	38.1	82.6	41.8	6.35	3.1	14.3	460						7.20	5.60	2.52			
CC13SB			38.5					43	11	6.5	2.85							
CC13SC			56					43	13.2		3.08							
CC14SA		88.9	41.8															2.67
CC14SB			38.5					43	11	6.5	3.0							
CC14SC			56					43	13.2		3.23							
CC16SA		101.6	41.8															2.93
CC16SB			38.5					43	11	6.5	3.26							
CC16SC			56					43	13.2		3.49							
CC18SA		114.3	41.8															3.15
CC18SB			38.5					43	11	6.5	3.78							
CC18SC			56					43	13.2		3.60							
CC24SA		152.4	41.8															3.96
CC24SB			38.5					43	11	6.5	4.31							
CC24SC			56					43	13.2		4.54							
CC30SA		190.5	41.8															4.70
CC30SB	38.5		43	11	6.5	5.06												
CC30SC			56	43	13.2		5.29											