



铺路机链

Paver Chains

链号	H ₁	H ₂	E ₁	E
Chain No.	mm	mm	mm	mm
C9856	117.47	89.84	20.6	165.1
9856	117	85.7	20.8	167.8
RMC15126	120.85	73	20.8	165.1
RMC15517	83.55	33.55	12.5	88.9
RMC15759	80.35	34.95	12.8	92
RMC15491-1	79.35	47.8	16.78	114.3

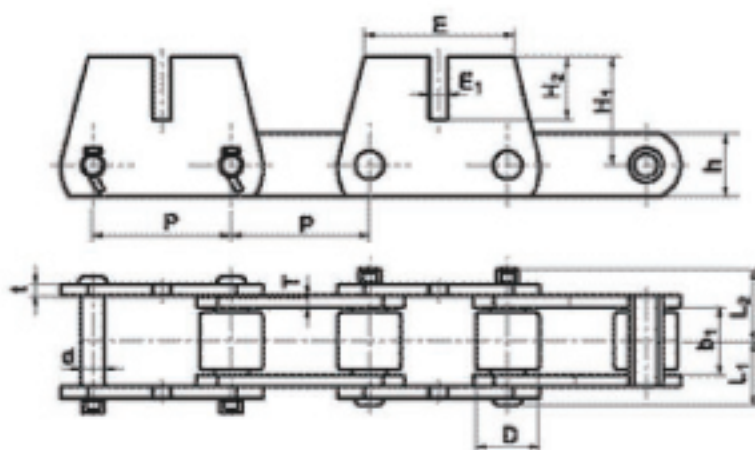

链号	节距	内节内宽	滚子	销轴			链板		最小抗拉强度	许用工作	每米净重
				Pin	Pin	Pin	Sidebar	Sidebar			
Chain No.	Pitch	Width between sidebars	diameter	d	L ₁	L ₂	h	t/T	Ultimate tensile strength	Rated working load	Weight per meter
	P	b ₁ (min)	D (max)	mm	mm	mm	mm	mm	Q _{min} kN	kN	q kg/m
C9856-M2	162.4	74.93	69.85	25.3	72.6	82.3	69.85	12.7	622	49.8	44.35
9856-M2	162.4	76.2	69.85	25.4	73.4	80.8	70	12.7	622.3	50	44.95
RMC15126	152.4	78.2	69.85	25.4	71.3	77.7	63.5	12.7	622.3	50	43.0
RMC15517	78.1	37.8	31.75	15.88	44.5	48.9	38.1	9.5	266.7	24	13.52
RMC15759	78.1	37.8	31.75	15.88	47.7	52.1	44.5	9.5/12.7	266.7	29	16.88
RMC15491-1	101.6	50.4	38.1	19.05	57.4	63.6	44.5	12.7	355.6	32	22.5

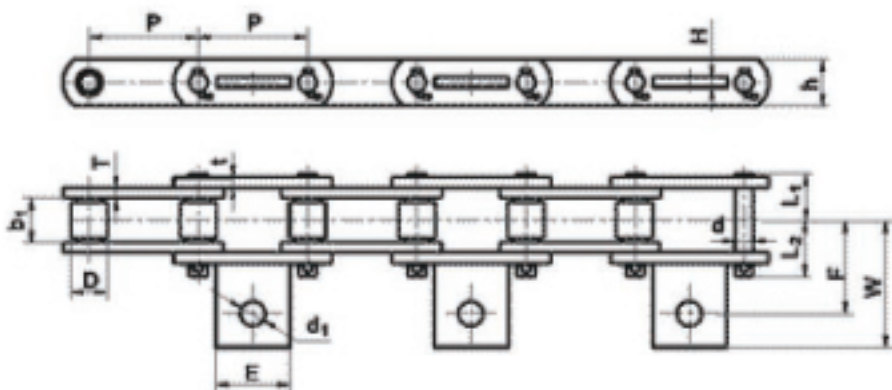

链号	F	W	d ₁	E	H
Chain No.	mm	mm	mm	mm	mm
SGR-188	43.5	58.4	6.3	31.8	6.4
RMC15352	37.8	53.7	8.7	31.8	6.4
RMC15310	63.5	80	16	45	6.4

链号	节距	内节内宽	滚子	销轴			链板		最小抗拉强度	许用工作
				Pin	Pin	Pin	Sidebar	Sidebar		
Chain No.	Pitch	Width between Sidebars	diameter	d	L ₁	L ₂	h	t/T	Ultimate tensile strength	Rated working load
	P	b ₁ (min)	D (max)	mm	mm	mm	mm	mm	Q _{min} kN	kN
SGR-188	66.27	26.8	22.23	11.1	28.8	33.6	28.6	6.4	124.6	10
RMC15352	57.15	26.99	22.23	11.1	24.5	28.5	23.8	4	49.2	4.4
RMC15310	66.27	26.8	22.23	11.1	28.8	33.6	28.6	6.4	124.6	11.2