
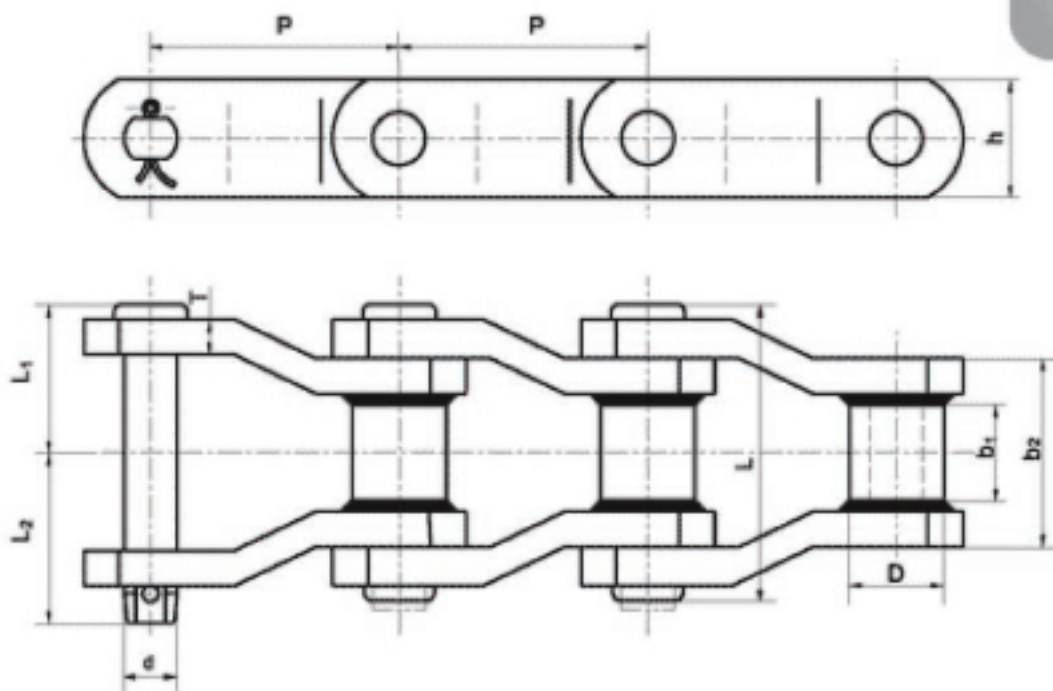


窄系列焊接弯板链

Narrow Series Welded Steel Chains

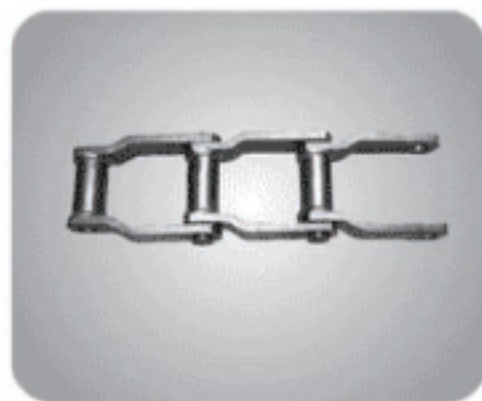

链号 Chain No.	节距 Pitch P mm	窄端 Narrow end		套筒外径 Bush diameter D(max) mm	链板 Sidebar h mm, T mm		销轴 Pin d mm, L mm, L ₁ mm, L ₂ mm				最小抗拉 强度 Ultimate tensile strength Q _{min} kN	许用工 作载荷 Rated working load kN	每米 净重 Weight per meter q kg/m
		b ₁ (min) mm	b ₂ (max) mm										
WR106	152.4	41.2	71.6	31.75	38.1	9.5	19.05	102.5	52	56	176.7	29.45	9.6
WH106	152.4	41.2	71.6	31.75	38.1	9.5	19.05	102.5	52	56	266	44.33	9.6
WR111	120.9	50.8	85.7	31.75	44.5	9.5	19.05	110.2	59.35	63.25	169	25.67	13
WH111	120.9	50.8	85.7	31.75	44.5	9.5	19.05	110.2	59.35	63.25	224.6	37.33	13
WR124	101.6	41.2	71.5	31.75	38.1	9.5	19.05	102.5	52	56	204	34.00	11.52
WH124	101.6	41.2	71.5	31.75	38.1	9.5	19.05	102.5	52	56	266.7	44.45	11.52
WR132	153.67	76.2	111.6	44.5	50.8	12.7	25.4	152.7	77.3	81.7	275.8	45.97	21.03
WH132	153.67	76.2	111.6	44.5	50.8	12.7	25.4	152.7	77.3	81.7	378.1	63.02	21.03
WR150	153.67	76.2	111.6	44.5	63.5	12.7	25.4	152.7	77.3	81.7	450	75.00	24.86
WH150	153.67	76.2	111.6	44.5	63.5	12.7	25.4	152.7	77.3	81.7	600	100.0	24.86
WH720S	152.4	28.5	55	32	40	10	19.05	/	44.5	49.5	224	37.33	9.65
FWHX150	153.67	71	110	44.5	65	12	25	148.7	75	81	540	90	24.7