



# 铺路机链 Paver Chains

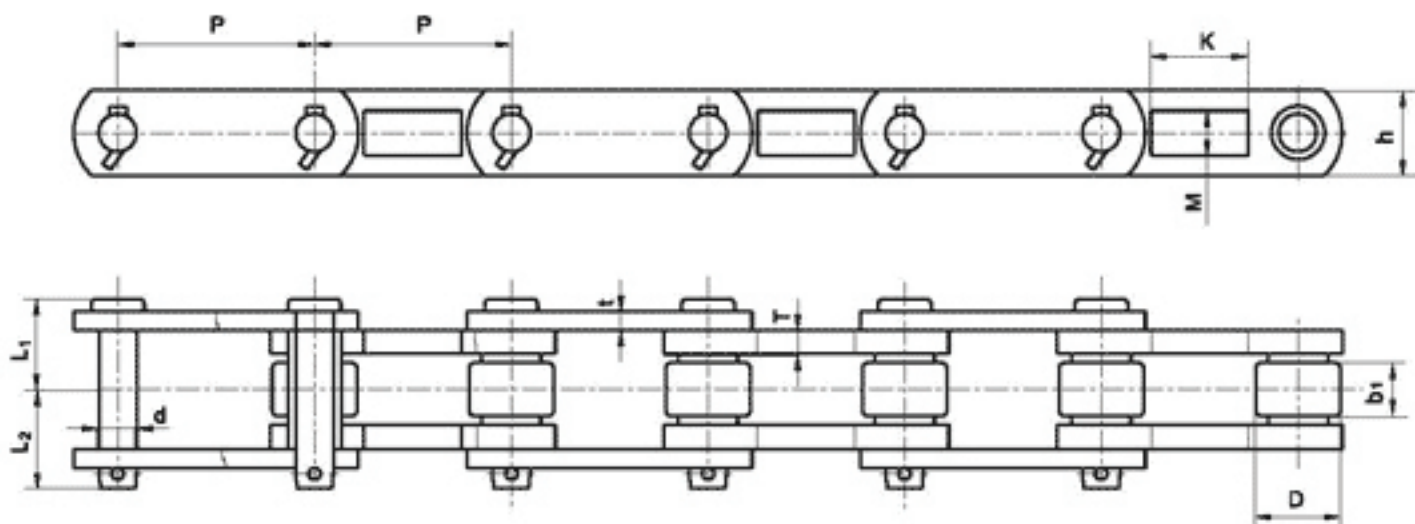

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars $b_1$ (min) mm	滚子 外径 Roller diameter D(max) mm	销轴 Pin			链板 Sidebar				最小抗拉 强度 Ultimate tensile strength $Q_{min}$ kN	许用工作 载荷 Rated working load kN	每米净重 Weight per meter q kg/m
				d mm	$L_1$ mm	$L_2$ mm	h mm	t/T mm	M mm	K mm			
RMC15758	66.27	23.7	28.6	12.7	31.3	35.5	28.6	6.4/8	15	32.8	142.2	10.7	6.43
C1598	69.85	15.8	31.75	14.27	28.4	33.3	32.5	8	14.2	33.3	130	9.8	6.84

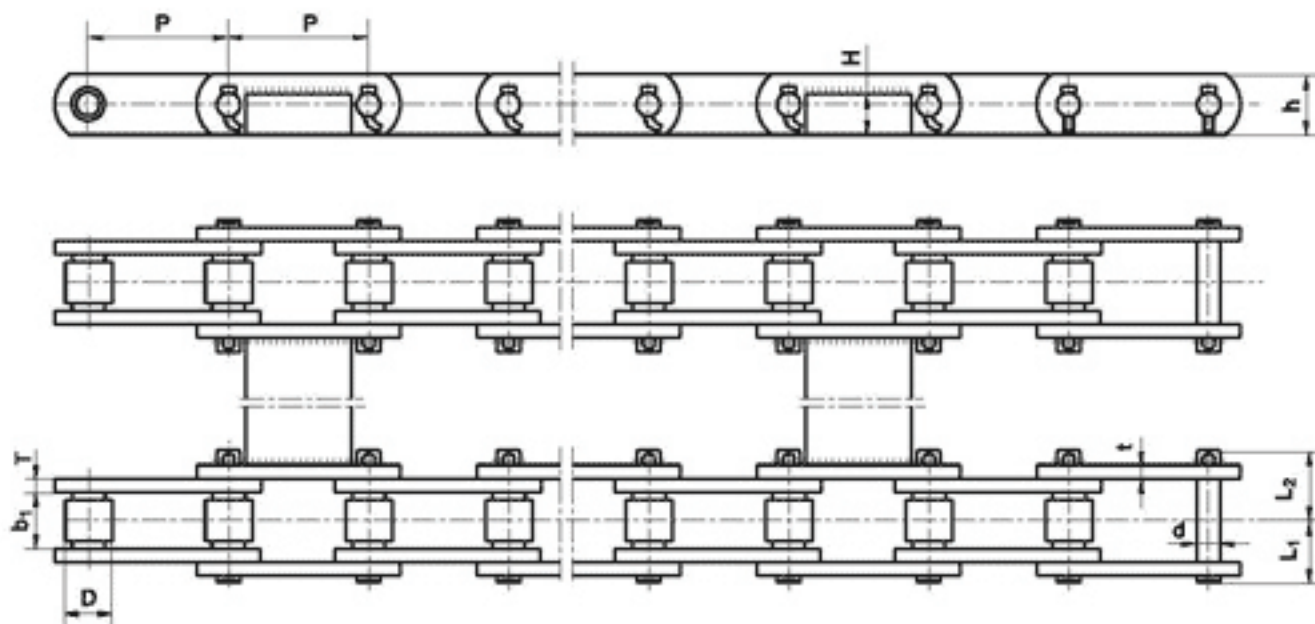

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between sidebars $b_1$ (min) mm	滚子 外径 Roller diameter D(max) mm	销轴 Pin			链板 Sidebar		最小抗拉 强度 Ultimate tensile strength $Q_{min}$ kN	许用工作 载荷 Rated working load kN
				d mm	$L_1$ mm	$L_2$ mm	h mm	t/T mm		
RMC15718	66.27	26.8	22.23	11.1	28.8	33.6	28.6	6.4	284.8	17.1